


# Operations Guide - GreaseShield® 1000-FLF

**Front Loading Pre-Filter**  
Solids are collected and de-watered in the removable Filter Sleeve. The sleeve must be emptied regularly and cleaned at least once a day. Please ensure the sleeve is always screwed fully in place during normal operation.




**Automated Self Cleaning**  
Upon activation clean hot water is added into the GreaseShield®, via a WRAS approved water solenoid valve. This action, agitates and circulates the effluent preventing build of fine sediments in the tank.

(Additional cleaning cycles can be added upon request)



## Normal Operational Times

GreaseShield®  
PATENT No. GB2497234



The standard operation times for a GreaseShield®1000 is from 07:00 hrs until 02:30 hrs.



**Grease Removal** - 5 minutes on followed by 5 minutes off for the duration of the operational period.

**Cleaning** - Once a day, at the start of operation.

(These operation times can be adjusted upon request.)

## FOG Container

The extracted FOGs are collected in the FOG storage container. This container must be emptied and cleaned at least once a day including the wiper blade. The Max Fill Line should not be exceeded.

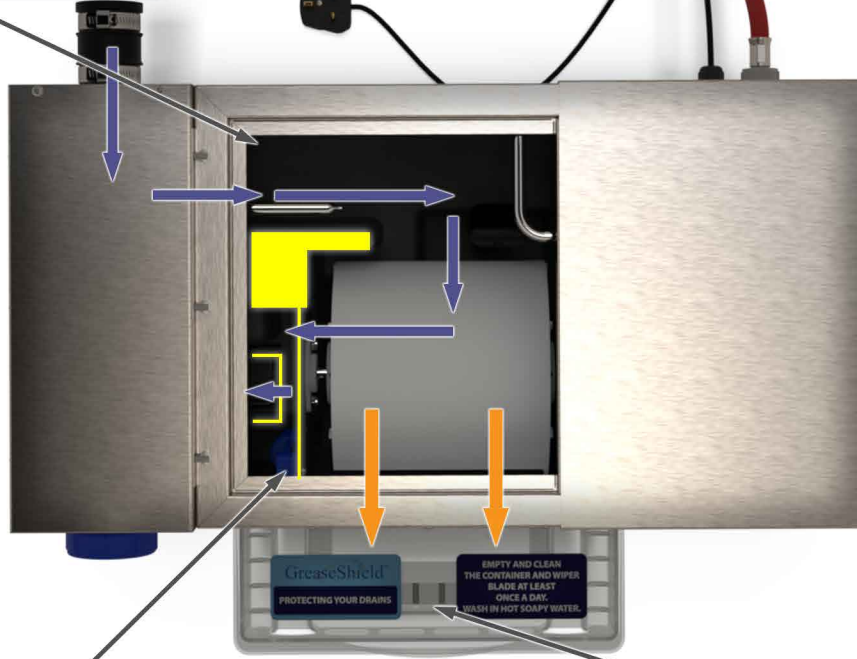

**Anti-Flood Sensor**  
If the effluent level inside the GreaseShield® becomes too high, a pressure sensor is triggered, activating a pump. This pump extracts Grey Water from the bottom of the tank and sent directly to the drain via the normal outlet.

## FOG Removal

A number of co-operating baffles combined with the reverse flow design of the tank, utilises the difference density of grey water and FOGs to separate the effluent. FOGs are directed towards a large, oleophilic (attracts FOGs) and hydrophobic (repels water), FOG Removal Roller. This submerged Roller removes the FOGs from the effluent. A silicone Wiper Blade, with anti-static properties, scrapes the FOGs from the roller and deposits them into the FOG Container.



**Environmental Products and Services Ltd**

Award Winning Technology

[www.GreaseShield.com](http://www.GreaseShield.com)

HEAD OFFICE +44 (0) 28 3083 3081

[sales@epas-ltd.com](mailto:sales@epas-ltd.com)

GB OFFICE +44 (0) 161 477 5555

V3 28/06/2021